



## NBH8-40□ 家用断路器

1

NBH8-40□

50Hz

230V


40A

GB/T 10963.1 IEC/EN 60898-1

CCC CE SEMKO VDE EAC

RCC KEMA

2



4500A H 6000A

(A)

3

1

技术参数项目	参数值
	230V AC
	1A 2A 3A 4A 6A 10A 16A 20A 25A 32A 40A
	1P+N
	B C
	2 1
	3
	4
	4500A (NBH8-40) 6000A (NBH8-40H)
	3
	5
	1.5N·m
	2 3
	2
	IP20
	III

3.1


2

序号	型式	试验电流	起始状态	脱扣式不脱扣时间极限	预期结果	备注
a	B C	1.13In		t 1h		
b	B C	1.45In		t 1h		5s
c	B C	2.55In		1s t 60s( In 32A) 1s t 120s( In 32A)		
d	B C	3In 5In		t 0.1s		
e	B C	5In 10In		t 0.1s		




5Y\_bSĒ[%o^Å\:[ø

Vp 2 Y\_bSĒ[%o^Å\:[ø

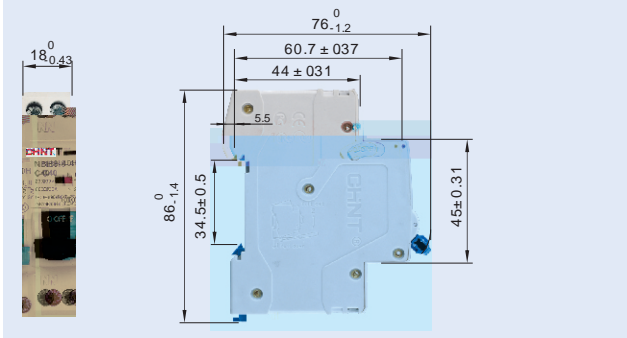

Vp 3 TH 35 - 7.5W[%o^Å\:[ø

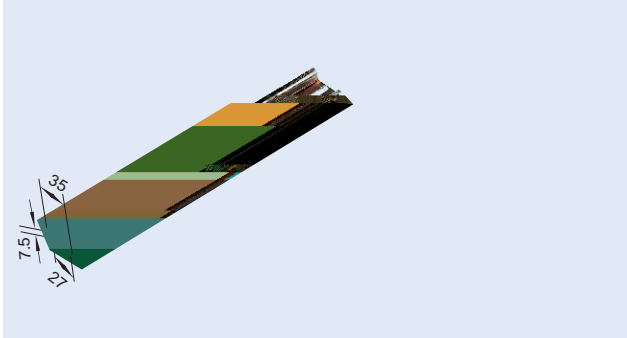

6<ø~{wå

6.1 <øeö\_Å— <of ÿ

6.1.1 e-•iVhv,,T yð0 W<S÷ÿ

6.1.2 e-•iVhw-eö•1bcVhW<\_ ( BW<0 CW< )ÿ

6.1.3 e-•iVhv,,~•[š5mAÿ

6.1.4 ep'İ0

6.2 <øy:O<

u(b7<ø N B H 8 - 4 0[¶u(e-•iVhÿ ~•[š5mAN: 6 Aÿ

w-eö•1bcVhW<\_ N: BWÿ ep'İ 5 0Sð0

NfQT^M:Nÿ N B H 8 - 4 00 B 60 5 0Sð0