


NM2LC

1

NM2LC


(TT)

JP



NM2LC-125/M/S

2

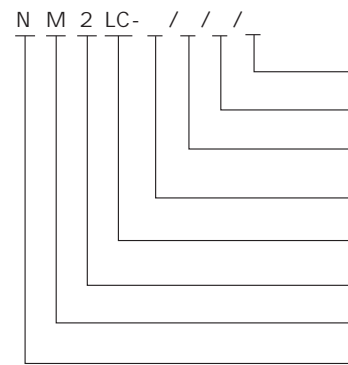

*

Y() S
H() M

*

RS485
L

H :

AX :

AL :

3

3.1	-5 ~ +40	-25 ~ +70	
3.2	40	50%, 90%	25 95%
3.3	2000	1000	
3.4	10%		
3.5	3		
3.6		5	

4

4.1	
4.2	20%,
4.3	
4.4	32 ARM
4.5	485



NM2LC-250/M/S



NM2LC-400



NM2LC-630

7

7.1



$$T = (6lr_1/l) \cdot {}^2t_r \pm 10\% \quad T \quad lr_1 \quad l \quad tr$$

7.2




7.3



7.4





			60s				
		120s				" "	
	100mA		300mA		150mA		60s
500mA		150mA	120s	200mA			
◆	/						
			20-60				5
◆							
	250V ~ 300V	265V					
◆							
	150V ~ 200V	165V					
◆							
◆							
◆	/						
◆							

